



ROMAN BLIND KITS

Quality and Child Safety Come First

WARNING


To avoid possible strangulation keep cords out of reach of children




ROMAN BLIND INSTRUCTIONS

ATTACHING BLIND TO TRACK

- 1 First sew velcro to header of blind then attach to track as shown

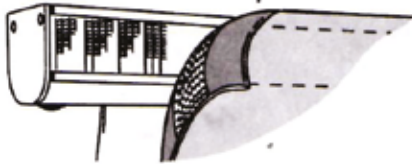


Tie the cord stoppers (orbs) to the bottom of the fabric as shown.



CUT & SECURE AT THESE POINTS

HANGING THE RAIL

- 3 Mark and fix the supports in position. (We recommend that for plaster walls a wooden batten be secured first).

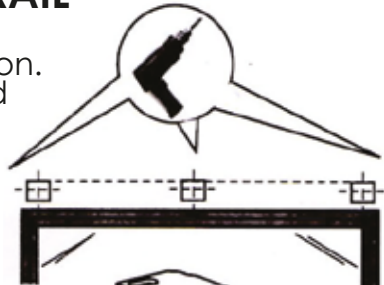


TOP FIX



FACE FIX



LOCK
UNLOCK

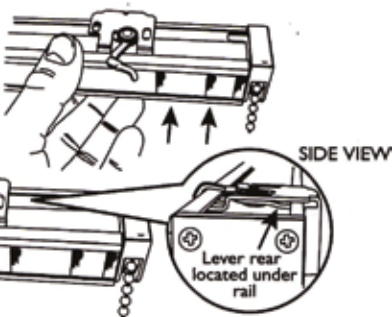


SIDE VIEW

Lever rear located under rail

ADJUST THE SPOOLS

- 5

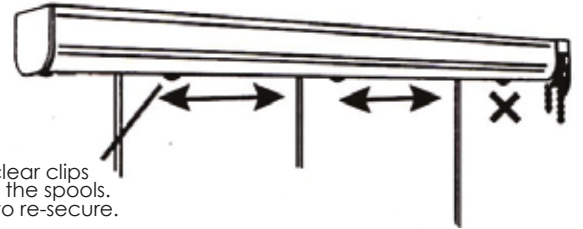

Unlock the clear clips to reposition the spools. Lock again to re-secure.


MOUNTING THE CORD SAFETY GUIDE

- 6 NOTE: This can only be used with longer blinds as a continuous chain without connectors, and shorter (160cm & under) blinds with chain connector.



SWITCHING CHAIN TO LEFT/RIGHT

- 7

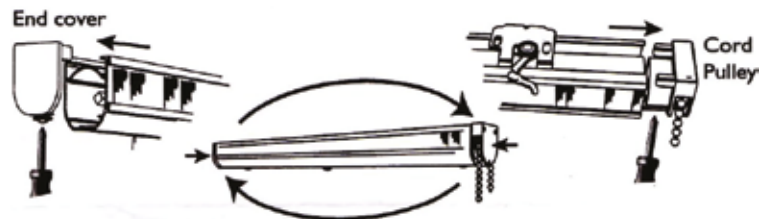

REMOVE THE ORANGE PEGS

- 8 The orange pegs secure the blind mechanisms in place so that nothing moves while you are putting it all together. One last step is to remove the orange pegs so the blinds will pull up.